


MATERIAL SPECIFICATIONS

- A) METER, SEALED REGISTER, STD. GALLONS LESS CONNS., ROCKSYN CHAMBER & PISTON, COMPOSITE BOTTOM PLATE, BRONZE CAP SCREWS & LID (ROCKWELL)
- B) 5/8 X 3/4 INCH ANGLE BALL VALVE FORD CAT NO. BA94-323W
- C) METER EXPANSION FITTING FORD CAT NO. EC-23
- D) 5/8 X 3/4 INCH YOKE ELL FORD CAT NO. HHCA 94-323G
- E) 5/8 X 3/4 INCH YOKE BAR FORD CAT NO. Y 502


DOMESTIC

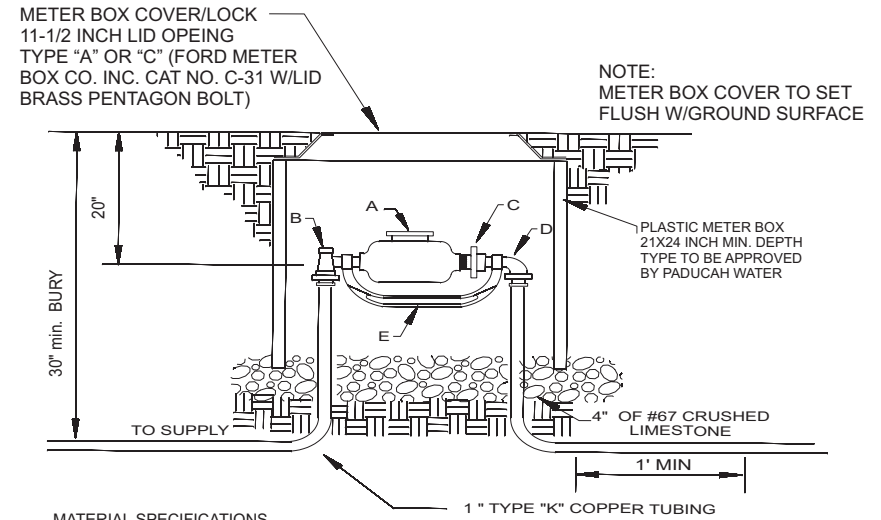


MATERIAL SPECIFICATIONS

- A) METER, SEALED REGISTER, STD. GALLONS LESS CONNS., ROCKSYN CHAMBER & PISTON, COMPOSITE BOTTOM PLATE, BRONZE CAP SCREWS & LID (ROCKWELL)
- B) 1 INCH ANGLE BALL VALVE FORD CAT NO. BA944-444WG
- C) METER EXPANSION FITTING FORD CAT NO. EC-04
- D) 1INCH YOKE ELL FORD CAT NO. HHCA 94-444G
- E) 1INCH YOKE BAR FORD CAT NO. Y 504


IRRIGATION

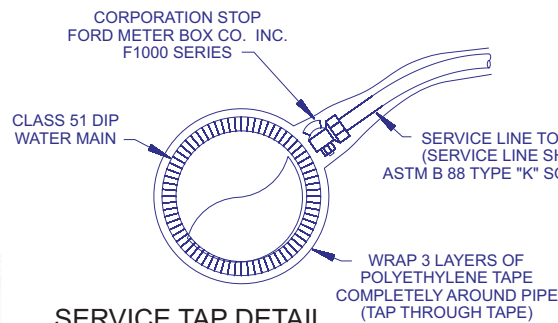

**SERVICE TAP DETAIL
DUCTILE IRON PIPE
POLYETHYLENE ENCASED**

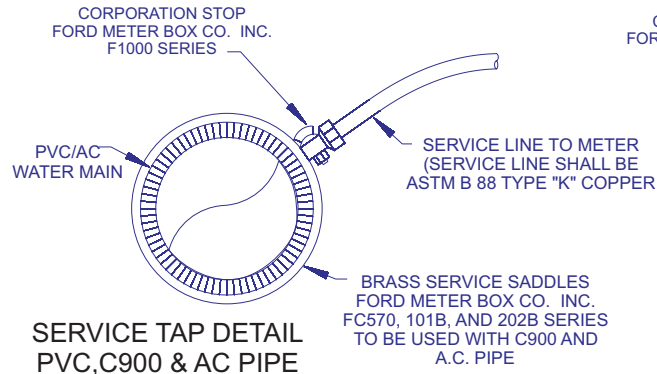

**SERVICE TAP DETAIL
PVC,C900 & AC PIPE**

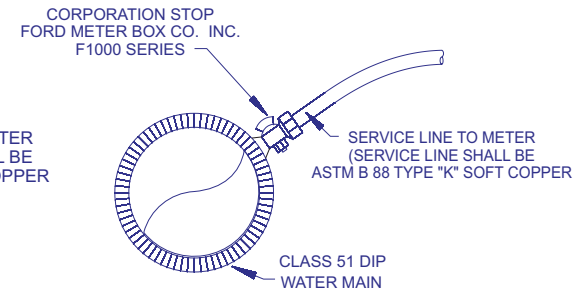

**SERVICE TAP DETAIL
DUCTILE IRON AND
CAST IRON PIPE
"NON POLY WRAP"**

NOTE:

1. DUCTILE IRON & CAST IRON PIPE SHALL BE INSTALLED WITH DIRECT MAIN TAP NO SADDLE REQUIRED UNLESS OTHERWISE APPROVED BY PW STAFF.
2. PVC,C900 AND AC PIPE SERVICE TAPS SHALL REQUIRE INSTALLATION OF A BRASS SERVICE SADDLE AS SPECIFIED BY MATERIAL SPECIFICATIONS.

